

SPECIFICATIONS:

LCD Panel

Model# HT-50D Floor Stand

Sizes	50"
Screen Panel Type	1850*671.9*460mm
Display Area	1073.78(H)x604(V)
Resolution	1920*1080
Display Rate	16:9
Brightness (type)	3000:1
Contrast	300cd/m2
Reviewing Angle	6ms (typ)
Colorful	8bit 16.7M
Response time	178°/178°
Speaker	10W,8Ω

Android Solutions (Standard)

Android Board	RK3288 (Standard) RK3568 /RK3399
Android OS	Android 7.1 OS (Standard)
Android CPU	64-bit 4 cores, main frequency 1.5GHZ
Flash Nandi	8GB (Standard) /16GB /32 GB
RAM DDR	1GB (Standard) / 2GB /4GB
WIFI	Wi-Fi 2.4G, 802.11 1x1 BGN+BT
Internet	1*10/100M Ethernet
Interfaces	USB, TF, RJ45, HDMI In (Option)
Playing	APP publishing program in English Card read play
Feature	Support all format files of Videos & Audios, loop,Tming, split screens (2/4 screens), subtitles

Power


Power Supply	AC100V to AC240V
Consumption (standby)	≤1W
Consumption (max)	80W

Physical

Frame Color	Sliver / Black Color
Shell Materials	Aluminum frame drawing process metal backside and base stand
Dimension- Body Pack	1950*800*220mm
Dimension- Base Pack	780*500*60mm
Weight	63KG

Environments

Temperature	Working : 0°C to 40°C ; Storage :-20°C to 55°C;
Humidity	Working:10%-90% RH , Storage: 10%~95%RH
Working Time	24/7 hours working

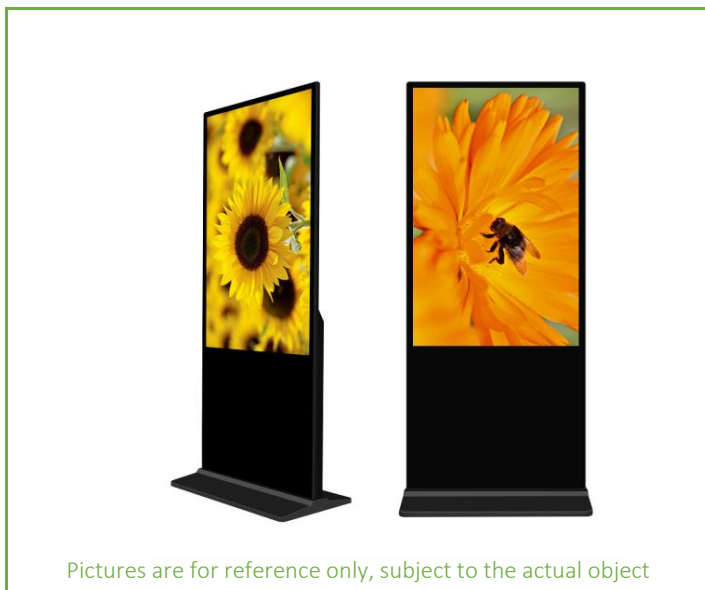

PC Solutions (Optional)

Mainboard	X86 advertising mainboard
Processor	Intel I3, I5, I7 CPU
Memory	4GB / 8GB DDR3 /DDR4
Storage	128GB / 256GB SSD / HDD
WIFI	WIFI 2.4G, 802.11 1x1 BGN+BT
LAN	1*10/100 /1000M Ethernet
OS	Window 10 /11 OS (copy version)
Mainboard Port	HDMI, USB, RJ45

Touch Screen (Optional)

Technolgy	Infrared touch screen Optional: Capacitive Touch screen
Surface Protection	4mm tempered glass Anti-glared glass option

What's in the carton

Powe Cable	x1, 1.5m length
Remote Control	x1, English language
LCD Display	x1, plastic bag with foam inside
Base	x1

Certificate

CE	EMC, LVD, RED test
ROHS	Safety test
ISO	ISO9001 Quality Management
FCC	FCC Document